

Using Integrity To Make Friends.

Using Real Feelings To Broaden Business.

Realizing Win-Win For Harmonization.



XINXIANG HUNDRED PERCENT ELECTRICAL AND MECHANICAL CO., LTD.



XINXIANG HUNDRED PERCENT ELECTRICAL AND MECHANICAL
CO., LTD.

Address: 55 Government Avenue, Yulin Town, Yanjin County,
Xinxiang City, Henan, China

Website: www.bfbtransfercar.com

Phone/Wechat/WhatsApp: +86 17772872530

Xinxiang, Henan



COMPANY PROFILE

Xinxiang Hundred Percent Electrical And Mechanical Co., Ltd. is a professional manufacturer and exporter of material handling and lifting equipment, such as electric chain hoist, lift platform, etc. We have more than 20 years' experience, and our product has exported to more than 90 countries, including Malaysia, Philippines, Thailand, Indonesia, Qatar.

BEFANBY is a professional and international handling equipment company integrating R&D, design, production and sales. It has a modern management team, technical team and production technician team.

Founded in September 2003, the company is located in Xinxiang city, Henan province, covering an area of 33,300 square meters. It has a modern large-scale factory building, world-advanced production equipment and office equipment. The company has more than 150 employees, including 8 engineers and more than 20 technicians.

BEFANBY can not only provide aerial working lift platform and transfer cart quotations, but also provide you with satisfactory handling solutions.

ENTERPEISE CULTURE

BEFANBY Mission

To carry entrustment and live up to trust.

BEFANBY Philosophy

Unity, struggle, co-creation, win-win.

BEFANBY Vision

30 years of deep cultivation of handling equipment, serving 300,000 customers around the world.



MOBILE SCISSOR LIFT PLATFORM




Models	Platform Size	Load Capacity	Lifting Height	Dimension	Weight
SJY0.5-4	2100*830mm	500kg	4m	2250*950*1200mm	880kg
SJY0.5-6	2100*830mm	500kg	6m	2250*950*1200mm	880kg
SJY0.5-7	2100*830mm	500kg	6.8m	2250*950*1280mm	970kg
SJY0.5-8	2100*930mm	500kg	8m	2250*1060*1380mm	1050kg
SJY0.5-9	2100*930mm	500kg	9m	2250*1060*1500mm	1165kg
SJY0.5-10	2100*1230mm	500kg	10m	2250*1350*1530mm	1360kg
SJY0.3-11	2100*1230mm	300kg	11m	2250*1350*1650mm	1400kg
SJY0.5-12	2100*1530mm	500kg	12m	2796*1670*1750mm	2260kg
SJY0.5-14	2100*1530mm	500kg	14m	3067*1730*1810mm	2486kg
SJY0.3-16	2100*1600mm	300kg	16m	3067*1810*2080mm	3063kg
SJY0.3-18	2100*1600mm	300kg	18m	3321*1810*2080mm	3900kg

Standard Configuration

- Manual platform lowering valve
- Self-lock device
- Water proof electrical control box
- Pneumatic tyre
- Telescopic leg
- Towing bar




SELF PROPELLED SCISSOR LIFT PLATFORM

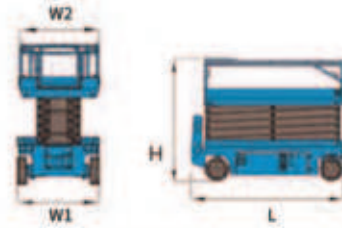

Standard Configuration

- Pothole guards
- Extension deck
- Solid non-marking tires
- Emergency lowering system
- Tilt level sensor

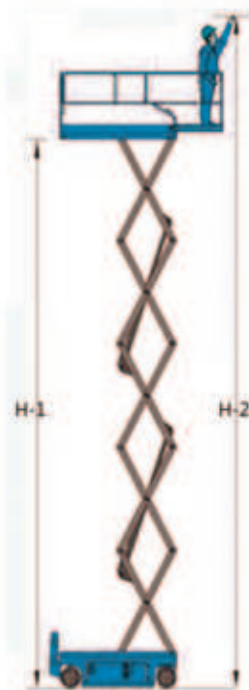

- Folding rails
- On-board diagnostic system
- Emergency stop
- Manual platform lowering valve

Models	GTJZ06	GTJZ08	GTJZ10	GTJZ12	GTJZ14
Max Working Height	8.00m	10.00m	12.00m	13.8m	15.7m
Max Platform Height	6.00m	8.00m	10.00m	11.8m	13.7m
Safe Working Load	500kg	450kg	320kg	320kg	227kg
Extended Platform Safe Working Load	113kg	113kg	113kg	113kg	113kg
Working Platform Size	2.2*1.1*1.13m	2.26*1.13*1.13m	2.26*1.13*1.13m	2.26*1.12*1.13m	2.64*1.12*1.13m
Overall Size (Unfold Guardrail)	2.475*1.15*2.15m	2.475*1.15*2.28m	2.475*1.15*2.41m	2.475*1.19*2.54m	2.8*1.39*2.59m
Overall Size (Folding Guardrail)	2.475*1.15*1.711m	2.475*1.15*1.85m	2.475*1.15*1.974m	2.475*1.15*2.105m	2.8*1.39*2.096m
Length Extension Deck	0.9m	0.9m	0.9m	0.9m	0.9m
Ground Clearance-Center	0.1/0.02m	0.1/0.02m	0.1/0.02m	0.1/0.02m	0.1/0.02m
Wheelbase	1.89m	1.89m	1.89m	1.89m	2.26m
Turning Radius (Inner /Outer Wheel)	0.15/2.3m	0.15/2.3m	0.15/2.3m	0.15/2.3m	0.15/2.85m
Lifting/Driving Motor	24v/4.5kw	24v/4.5kw	24v/4.5kw	24v/4.5kw	24v/4.5kw
Lifting Speed	3-5m/min	3-5m/min	3-5m/min	3-5m/min	3-5m/min
Driving Speed (Folded State)	4km/h	4km/h	4km/h	4km/h	3.5km/h
Driving Speed (Lifting State)	0.8km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h
Battery	4*6v/225ah	4*6v/225ah	4*6v/240ah	4*12v/300ah	4*12v/300ah
Charger	24v/30a	24v/30a	24v/30a	24v/30a	24v/30a
Max Grade Ability	25%	25%	25%	25%	25%
Maximum Allowable Working Angle	1.5°/3°	1.5°/3°	1.5°/3°	1.5°/3°	1.5°/3°
Tyre	381*127mm	381*127mm	381*127mm	381*127mm	381*127mm
Weight	2060kg	2190kg	2430kg	2900kg	3400kg

SELF PROPELLED ROUGH TERRAIN SCISSOR LIFT



Models	GTJN10	GTJN13	GTJN16
Load Capacity	1000kg	680kg	680kg
Load Capacity-Extension Deck	230kg	230kg	230kg
Max Platform Occupancy	7	7	7
Working Height	12m	15m	18m
Platform Height-A	10m	13m	16m
Platform Height Stowed-B	1.55m	1.80m	2.02m
Platform Length-C	3.98m	3.98m	3.98m
Platform Extension Length	1.3m	1.3m	1.3m
Platform Width-D	1.83m	1.83m	1.83m
Overall Height-E	2.98m	2.98m	3.19m
Overall Length-F	4.88m	4.88m	4.88m
Overall Width-G	2.27m	2.27m	2.27m
Wheelbase-H	2.86m	2.86m	2.86m
Ground Clearance-I	0.22m	0.22m	0.22m
Drive Speed (Platform Lowered)	6.8km/h	6.8km/h	6.8km/h
Drive Speed (Platform Elevated)	1km/h	1km/h	1km/h
Turning Radius-Inside	2.35m	2.35m	2.35m
Turning Radius-Outside	5.2m	5.2m	5.2m
Gradeability	45%	45%	45%
Maximum Tilt	3°	3°	3°
Non-Marking Solid Tires	33×12-20	33×12-20	33×12-20
Power Source	Perkins404D22 38kw/3000rpm	Perkins404D22 38kw/3000rpm	Perkins404D22 38kw/3000rpm
Auxiliary Power	12v	12v	12v
Hydraulic Reservoir Capacity	130l	130l	130l
Fuel Tank Capacity	100l	100l	100l
Weight	7940kg	8200kg	9190kg

Standard Configuration

- Automatic leveling hydraulic outriggers
- Dual slide-out platform extension deck
- Folding rails
- On-board diagnostic system
- Proportional lift and drive
- 4WD
- Four-wheel braking
- Emergency stop
- Rough terrain tires



ALUMINIUM ALLOY AERIAL WORKING PLATFORM



Product Features

Aluminum Alloy type lifting platform with high strength and high quality aluminum alloy material, has the advantages of beautiful appearance, small size, light weight, lifting balance, safe and reliable, its insurance platform wearing wire rope and safety protection device, and can operate, widely used in factories, hotels, restaurants, airports, stations, theaters exhibition hall and other places, can pass through the general and lift, it is very convenient to use. The company's newly developed 4*2 type aluminum alloy lifting platform, so that the maximum height of 26 meters.

DETAILS SHOWING



Mast	Models	Platform Height	Platform/Operator Height	Load Capacity	Platform Size	Supply Voltage	Power	Weight	Dimension
Single Mast	GTWY4-100	4m	5.7m	100kg	600*600m	AC220/50HZ	0.75kw	250kg	1280*800*1750mm
	GTWY6-100	6m	7.7m	100kg	600*600m	AC220/50HZ	0.75kw	280kg	1280*800*1900mm
	GTWY8-100	8m	9.7m	100kg	600*600m	AC220/50HZ	0.75kw	300kg	1280*800*1980mm
	GTWY9-100	9m	10.7m	100kg	600*600m	AC220/50HZ	1.1kw	320kg	1360*850*2000mm
	GTWY10-100	10m	11.7m	100kg	600*600m	AC220/50HZ	1.1kw	340kg	1360*900*1750mm
Double Mast	GTWY4-200	4m	5.7m	200kg	1100*600m	AC220/50HZ	1.5kw	380kg	1300*900*1750mm
	GTWY6-200	6m	7.7m	200kg	1100*600m	AC220/50HZ	1.5kw	420kg	1300*900*1900mm
	GTWY8-200	8m	9.7m	200kg	1150*600m	AC220/50HZ	1.5kw	550kg	1360*900*2000mm
	GTWY10-200	10m	11.7m	200kg	1350*600m	AC220/50HZ	1.5kw	600kg	1560*970*1900mm
	GTWY12-200	12m	13.7m	200kg	1450*600m	AC220/50HZ	1.5kw	700kg	1660*970*2000mm
	GTWY14-200	14m	15.7m	200kg	1450*600m	AC220/50HZ	1.5kw	800kg	1600*1100*2350mm
Three Mast	GTWY10-320	10m	11.7m	200kg	1570*900m	AC220/50HZ	2.2kw	900kg	2100*1250*2000mm
	GTWY12-320	12m	13.7m	200kg	1570*900m	AC220/50HZ	2.2kw	900kg	2100*1250*2000mm
	GTWY14-320	14m	15.7m	200kg	1570*900m	AC220/50HZ	2.2kw	1000kg	2100*1250*2350mm
	GTWY16-320	16m	17.7m	200kg	1570*900m	AC220/50HZ	2.2kw	1000kg	2100*1250*2650mm
Four Mast	GTWY10-420	10m	11.7m	200kg	1470*850m	AC220/50HZ	2.2kw	1100kg	2000*1250*1900mm
	GTWY12-420	12m	13.7m	200kg	1570*900m	AC220/50HZ	1.5kw	1200kg	2100*1250*2000mm
	GTWY14-420	14m	15.7m	200kg	1570*900m	AC220/50HZ	2.2kw	1300kg	2100*1250*2350mm
	GTWY16-420	16m	17.7m	200kg	1570*900m	AC220/50HZ	2.2kw	1500kg	2100*1250*2650mm
	GTWY18-420	18m	19.7m	200kg	1570*900m	AC220/50HZ	2.2kw	1700kg	2100*1350*2900mm
Six Mast	GTWY12-420	12m	13.7m	200kg	1570*900m	AC220/50HZ	1.5kw	1200kg	2100*1250*2000mm
	GTWY14-420	14m	15.7m	200kg	1570*900m	AC220/50HZ	2.2kw	1300kg	2100*1250*2350mm
	GTWY16-420	16m	17.7m	200kg	1570*900m	AC220/50HZ	2.2kw	1500kg	2100*1250*2650mm
	GTWY18-420	18m	19.7m	200kg	1570*900m	AC220/50HZ	2.2kw	1700kg	2100*1350*2900mm


SELF PROPELLED ARTICULATING BOOM LIFT



Standard Configuration

- Proportional controls
- Manual emergency pump
- Hour meter
- Tilt protection system
- Self-leveling platform
- Foot switch
- On-board diagnostic system
- Buzzer
- Horn
- Strobe light


Models	ZSJQ-12	ZSJQ-14	ZSJQ-16
Max Platform Occupancy	2	2	2
Load Capacity	200kg	230kg	230kg
Working Height	14m	15.7m	17.8m
Platform Height	12m	13.7m	15.8m
Max Horizontal Outreach	8m	7.4m	10m
Max Up And Over Clearance	5m	7.4m	7.6m
Working Platform Size	1.53×0.76×1.1m	1.53×0.76×1.1m	1.53×0.76×1.1m
Overall Height-H	2.00m	2.00m	2.00m
Overall Length-L	5.32m	5.54m	7.9m
Overall Width-W	1.75m	1.75m	2.28m
Wheelbase-Z	2.0m	2.0m	2.0m
Ground Clearance-G	0.20m	0.20m	0.20m
Turntable Rotation	355°	355°	360°
Platform Rotation	120°	160°	160°
Drive Speed (Platform Lowered)	3.2km/h	5.2km/h	5km/h
Drive Speed (Platform Elevated)	0.8km/h	0.8km/h	0.8km/h
Turning Radius	4.5m	4.5m	4.8m
Gradeability	25%	30%	30%
Turntable Tail Swing	0.125m	0m	0m
Tires	250×150	250×150	250×150
Power Source	48V DC power (8×6V/320Ah)	48V DC power (8×6V/420Ah)	48V DC power (8×6V/420Ah)
Driving System	6.5×2kw	6.5×2kw	6.5×2kw
Auxiliary Power Unit	12V DC	24V DC	24V DC
Hydraulic Reservoir Capacity	40l	70l	70l
Weight	5300kg	6500kg	6780kg

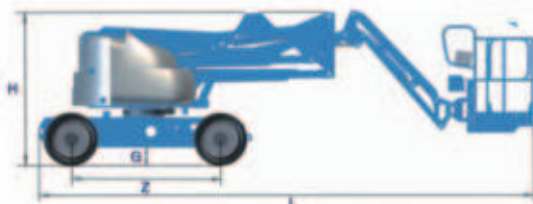

DETAILS SHOWING



SELF PROPELLED TELESCOPIC BOOM LIFT

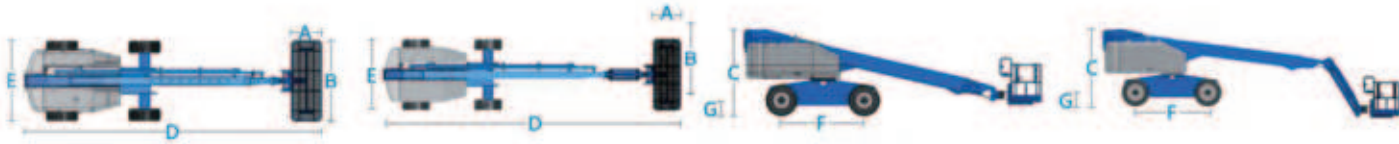

Standard Configuration

- Emergency lowering system
- On-board diagnostic system
- Tilt level sensor
- Emergency stop
- Self-leveling platform
- Proportional controls
- 12V DC auxiliary power
- Swing-out engine tray
- Hydraulic platform rotator

Models	ZSJE-18	ZSJE-20	ZSJE-22	ZSJE-24	ZSJE-26	ZSJE-30	ZSJE-32	ZSJE-38
Working Height	20.3m	22.3m	23.5m	25.4m	28.4m	31.3m	33.7m	40.1m
Platform Height	18.3m	20.3m	22.2m	23.7m	26.7m	29.6m	32m	38.4m
Max Horizontal Outreach	15.09m	17.3m	20.2m	20.3m	23.4m	21.2m	24.4m	24.4m
Platform Length-A	0.91m	0.91m	0.91m	0.91m	0.91m	0.91m	0.91m	0.91m
Platform Width-B	2.43m	2.43m	2.44m	2.44m	2.44m	2.44m	2.44m	2.44m
Overall Height-C	2.67m	2.67m	2.70m	2.70m	2.80m	2.80m	3.08m	3.08m
Overall Length-D	8.45m	10.27m	10.69m	11.3m	12.46m	13.5m	14.02m	14.1m
Overall Width-E	2.43m	2.43m	2.50m	2.50m	2.50m	2.50m	3.35m	3.35m
Wheelbase-F	2.46m	2.46m	2.50m	2.50m	3.00m	3.00m	3.66m	3.66m
Ground Clearance-G	0.3m	0.3m	0.43m	0.43m	0.43m	0.43m	0.43m	0.43m
Maximum Platform Occupancy	2	2	2	2	2	2	2	2
Lift Capacity	230kg	230kg	230kg	230kg	200kg	200kg	340kg	340kg
Turntable Rotation	360°	360°	360°	360°	360°	360°	360°	360°
Platform Rotation	160°	160°	160°	160°	160°	160°	160°	160°
Drive Speed (Platform Lowered)	6.8km/h	6.8km/h	6.3km/h	6.3km/h	5.3km/h	5.3km/h	4.4km/h	4.4km/h
Drive Speed (Platform Elevated)	0.8km/h	0.8km/h	1.3km/h	1.1km/h	1.1km/h	1.1km/h	1.1km/h	1.1km/h
Turning Radius-Inside	2.4m	2.4m	3.0m	3.0m	3.59m	3.59m	4.14m	4.14m
Turning Radius-Outside	5.13m	5.13m	5.2m	5.2m	6.25m	6.25m	6.56m	6.56m
Gradeability(2WD)	45%	45%	45%	30%	30%	30%	30%	30%
Gradeability(4WD)	45%	45%	45%	45%	45%	45%	45%	45%
Tires	38.5×14-20	38.5×14-20	9.00-20	9.00-20	12.00-20/8.5	12.00-20/8.5	12.00-20/8.5	12.00-20/8.5
Power Source	Cummins/Perkins							
Auxiliary Power Unit	12V DC	12V DC	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC
Hydraulic Reservoir Capacity	120L	120L	190L	190L	190L	190L	265L	265L
Fuel Tank Capacity	130L	130L	150L	150L	150L	150L	150L	150L
Weight(2WD)	12140kg	12640kg	13140kg	13640kg	16440kg	16940kg	18660kg	20160kg
Weight(4WD)	12220kg	12720kg	13220kg	13720kg	16520kg	17020kg	18740kg	20240kg


TOWED FOLDING ARM LIFTING PLATFORM



Product Features

The product machine arm, compact structure, adopts the new type of high quality steel, high strength, light weight, direct access to the start-up, erection speed, automatic pressure ability, can quickly set up safe and simple operation. Worktable can be higher levels but also extend the span is big, increasing the working area; Also can rotate platform automatic leveling. The obstacles to reach the working position, is the ideal high operating equipment. Easy to transport, can quickly dragged to hang directly.

DETAILS SHOWING

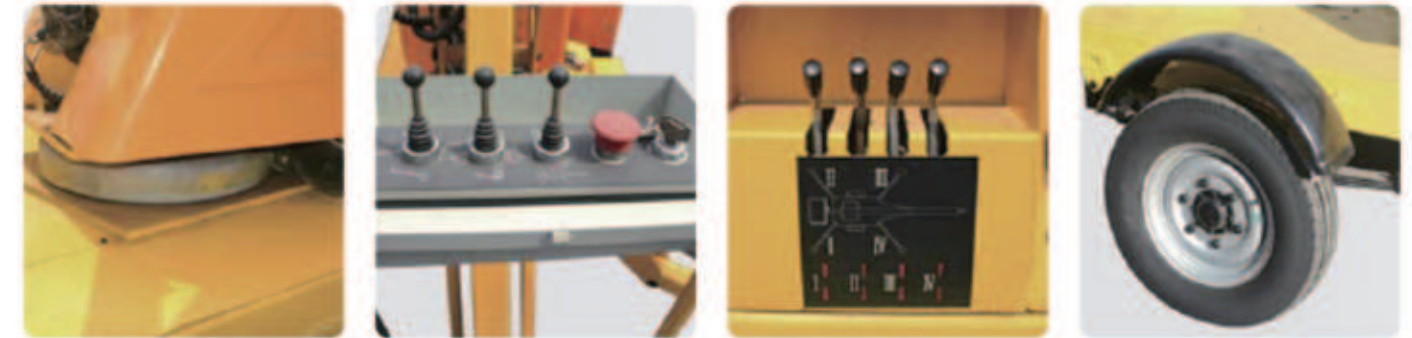

Models	Platform Size	Lifting Height	Working Height	Load Capacity	Dimension	Working Radius	Weight
SJT-8	1100*700mm	8m	10m	200kg	5.2*1.6*1.9m	3.5m	1.5t
SJT-10	1100*700mm	10m	12m	200kg	5.4*1.6*1.9m	4m	1.6t
SJT-12	1100*700mm	12m	14m	200kg	6.4*1.8*2.2m	5.5m	1.8t
SJT-14	1100*700mm	14m	16m	200kg	6.8*1.8*2.2m	6.5m	2.0t
SJT-16	1100*700mm	16m	18m	200kg	7.2*1.8*2.4m	7m	2.2t

SELF PROPELLED CRANK ARM LIFTING PLATFORM



Product Features

The products are widely used in railway stations, docks, public buildings and other industries and engage in the job of high-altitude areas. With mobile convenience, simple operation, a large work surface, a good balance of performance characteristics etc. In the case of case of uneven road surface, it can simultaneously support by four legs, or by one leg which is easy to operate.



DETAILS SHOWING



Models	SJT-10	SJT-12	SJT-13	SJT-14	SJT-15
Max.Working Height	10m	12.5m	13.5m	14m	15.5m
Platform Height	8m	10.5m	11.5m	12m	13.8m
Max.Horizontal Extent	3m	3.4m	3.8m	4m	4.2m
Rotation	360°	360°	360°	360°	360°
Load Capacity	180kg	180kg	180kg	180kg	180kg
Dimension	4000*1700*2700mm	4000*1700*2700mm	4600*2000*2900mm	4800*2100*3050mm	5100*2200*3300mm
Total Weight	1500kg	1600kg	1700kg	1800kg	1900kg
Drive Speed	15-30km/h	15-30km/h	15-30km/h	15-30km/h	15-30km/h

STATIONARY SCISSOR LIFT ▶

EVERYTHING CAN BE CUSTOMIZED

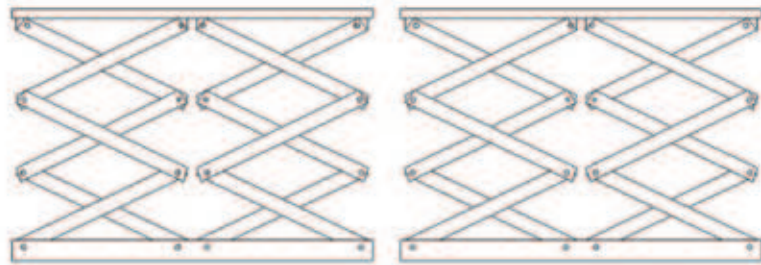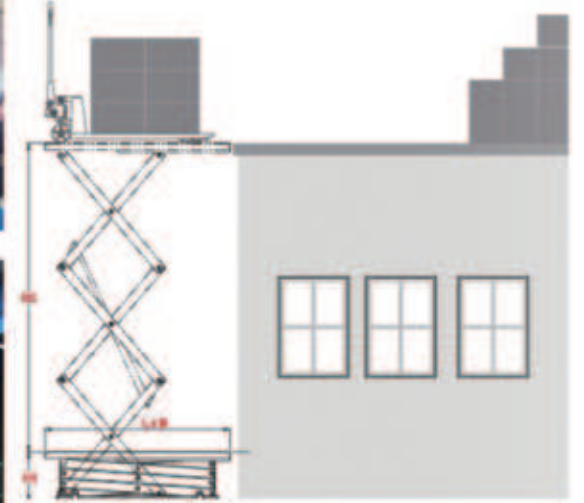



Company products are mainly composed of quality, opened the door of the international market, in order to cut the force of bamboo in the world within the scope of seller, with Russia, Singapore, the Netherlands, Thailand, Turkey, Nepal, Syria, South Africa, the Middle East and other users of more than 90 countries established long-term relations of cooperation.



LOADING AND DELIVERY



-  INTENTION
-  SAFETY
-  HIGH QUALITY



COOPERATIVE CUSTOMER >

In the aspect of material selection, the quality and price of the material itself is quite exquisite, and strive for the highest cost performance, before the customer to control the first important barrier, free from the customer's worries. Our products have been sold all over the country and exported to the United States, Canada, Mexico, Germany, Chile, Russia, Saudi Arabia, UAE, Thailand, Singapore, Indonesia, Malaysia, Australia, South Korea and other more than 90 countries and regions, favored by consumers, visiting customers on the company's management, technology, production process, product quality are given high evaluation and appreciation.



COOPERATIVE BRAND >

We always keep the concept that the user is God, considering anything from the point of view of the user solve the quality problem with high efficiency, serious attitude from beginning to end. Value the reputation and Preserve the image of our company.



AFTER-SALES SERVICE UNDERTAKING

Our company makes a promise of producing excellent quality product, offering satisfied team with mastery of technology, considerate service.

We sincerely offer the following service:

- ★ According to specific demands, we will design auxiliary devices and basic drawings for users free of charge, and provide technical services and drawing materials;
- ★ Free installation and debugging until the user is satisfied;
- ★ After receiving the user's product quality calls, letters, and verbal notifications, we will reply within 4 hours, arrive at the scene within 48 hours, and arrive at the scene within 24 hours for urgent questions;
- ★ Provide users with free technical consultation, technical training, and answer product-related questions;
- ★ During the warranty period, when the product is damaged or does not work properly due to quality problems, the user will be repaired or replaced with accessories free of charge;
- ★ After the bidding product is installed, the test will be run free of charge according to the user's time schedule to help the user establish a product operation file;
- ★ Deal with quality issues efficiently and conscientiously, and start and end well.

